



POSITION 1

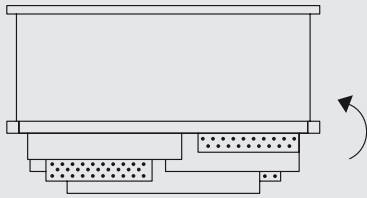

POSITION 2

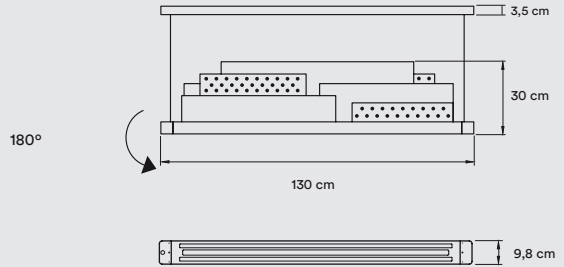

REF.

- SKYL S IV IV 20 LED DIM0-10V
- SKYL S IV GD 22 LED DIM0-10V
- SKYL S BK IV 20 LED DIM0-10V
- SKYL S BK GD 22 LED DIM0-10V
- SKYL S BN IV 20 LED DIM0-10V
- SKYL S BN GD 22 LED DIM0-10V
- SKYL S GD IV 20 LED DIM0-10V
- SKYL S GD GD 22 LED DIM0-10V

METAL ↕ ↕ A or B options

REF.

- SKYL S IV IV 20 LED DIMDALI & DIMBT
- SKYL S IV GD 22 LED DIMDALI & DIMBT
- SKYL S BK IV 20 LED DIMDALI & DIMBT
- SKYL S BK GD 22 LED DIMDALI & DIMBT
- SKYL S BN IV 20 LED DIMDALI & DIMBT
- SKYL S BN GD 22 LED DIMDALI & DIMBT
- SKYL S GD IV 20 LED DIMDALI & DIMBT
- SKYL S GD GD 22 LED DIMDALI & DIMBT

METAL ↕ ↕ A or B options

LIGHT SOURCE

Class I



Dual Circuit - DC: Enables independent dimming and control of the wood shades and the downlight

- 120 - 277V: Dimmable 0-10V & DALI
- 220-240V: Dimmable Bluetooth - BT

Drivers:

Constant Current 1400mA (shades & downlight)

LED Integrated:

Led module
Energy class A*

3.000K, CRI90, 115 W (80W DALI), 50-60Hz, 3312 lm*
Available in 2.700K and 4.000K on request

*Measurements obtained by theoretical calculations at LZf.

PACKAGING

Box Size: 142 x 48 x 20 cm

Box Volume: 0,14 m³

Weight: Gross - 27,2 Kg | Net - 22,9 Kg

MATERIALS & COMPONENTS

Multimaterial Shade
Wood Veneer, Perforated Metal & Textured Glass

Metal Structure & Canopy

4 Black Steel Cables: 2 m drop

2 Black Coaxial Cables: 2 m drop

FINISHES

METAL

*On Request

- IV-Matt Ivory
- BK-Matt Black
- *BN-Black Nickel
- *GD-Gold

PERFORATED METAL & WOOD VENEER

- A | ● IV-Matt Ivory Perforated Metal with ● 20 Ivory White Wood Veneer
- B | ● GD-Gold Perforated Metal with ● 22 Natural Beech Wood Veneer