





References



Certificates



Class I


Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V



Wood shade colours

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

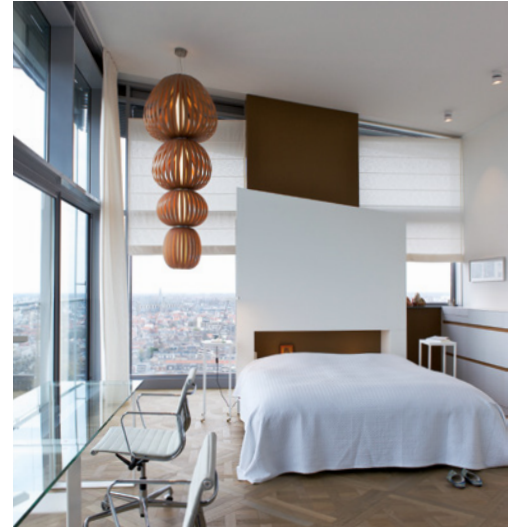

REF. TOT4 S LED 21
Totem 4 - Medium

Components



Metal canopy
Brushed Nickel
ø 14 cm - disc ø 20 cm

Electrical cable
Transparent 2 m drop

Steel cable
3 x 2 m drop



Box size
Shades
box 1: 101 x 101 x 84 cm
0,857 m³ | 10,9Kg
box 2: 76 x 76 x 69 cm
0,399 m³ | 7,1 Kg
box 3: 66 x 66 x 52 cm
0,227 m³ | 5,9 Kg
box 4: 51 x 51 x 62 cm
0,161 m³ | 4 Kg

Electrical kit
box 5: 182 x 37 x 25 cm
0,168 m³ | 10,4 Kg

Weight
Gross - 38,3 Kg
Net - 13,8 Kg



Required
Shade to base mount
Difficulty: *****




LED
Linear Module
28 x 5,5 W 350mA

Energy class
A+
LED integrated




Driver
 EFORE
3 units - Ref. RCL030-0900B
 EFORE
3 units - Ref. RCL030-0900B
+
Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD

Driver housed in fixture.

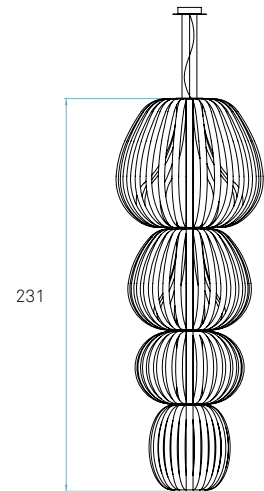

Details

Input Voltage	Luminous Flux	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	N/A	90	90 W	3000 K	40000h



ø 86